

VC57WD

Wide dynamic True Day & Night camera

Product Information

VC57WD is a WDR day/night camera specially designed for the professional Day/Night surveillance. At daytime, the camera features a 500TVL Colour image and at nighttime, the image is converted into real B/W mode (Colour signal removed) resulting in the resolution and sensitivity greatly enhanced. The unique wide dynamic technology with smart & easy-to-use OSD settings provides users with always the optimum solution for the best image quality at various situations. The camera incorporates an Intelligent CDS sensor and mechanical day/night dual filter system so that the filter is accurately switched on and off with the image changed from Colour to B/W or B/W to Colour mode at 5 lux darkness. With user friendly IR Link outputs, installers can easily connect any type of IR illuminator on the spot. Specially designed power circuit enables the camera operates from DC11V to DC40V and from AC15V to AC30V maximizing the reliability of the unit from power fluctuations. This wide tolerance accepts most of unstable power supplies without failure before or after installation.



Key Features:

- Super Wide Dynamic (sWDR)
- Easy-to-use OSD functions (possible to control locally or remotely)
- C/CS and Flange-back focus adjustment lever built-in
- IR Sensitive mechanical Day/Night filter system built-in
- True Colour at Day and Real B/W at Night conversion
- IR Connection terminals (two types) built-in
- Optic photo sensor built-in
- High performance 1/3" Sony Double Scan CCD
- High resolution of 500 TVL at Day/550 TVL at Night
- Greatly enhanced Sensitivity of 0.0001 Lux at F1.2
- Roll free picture with 24VAC Line Lock
- DC12V/AC24V Non-polarity Dynamic dual power input
- Auto DC/VIDEO iris
- Optic photo sensor built-in
- Camera ID
- Digital zoom(1x ~ 3x)
- Digital Slow Shutter (DSS)
- Privacy masking
- RS-485

True Day & Night image conversion for 24 hours clear view



True Day/Night switching

The image is converted to B/W mode from Colour and the IR cut filter is automatically removed at 5 lux darkness.



True Colour with a Blue filter/Precise focus with IR filter This dual filter mechanism is uniquely designed to have a blue filter in daytime for a precise colour reproduction and to have an IR focus corrective filter at nighttime so that there is no focus shift when the IR lights are activated.

Super Wide Dynamic (sWDR)

Light level is controllable with provided easy-to-use OSD menu that enables the camera to be ideally set up for the most of different levels of backlit or contrast lighting situations.



BLC OFF



BLC ON



VC57WD

The Maximum sensitivity with the best sensor and the latest technology

Used with the latest Sony Double scan CCD sensor, the **VC57WD** provides the highest light sensitivity of 0.2 Lux/F1.2. In addition the built-in Day/Night function completely removes the colour signal noises for an ultra clear nighttime image quality.



Conventional



VC57WD

Digital Slow Shutter (DSS)


The DSS function allows the camera can display the bright image even in extreme darkness.



2x



80x



160x

Day/Night signal link output (IR link)


VC57WD has an output that can be connected with the manufacturer's IR illuminator. This link offers an accurate time of image change from Colour to B/W and returning from B/W to Colour at 5Lux and the IR on/off at the same time.

Security Cameras & Equipment

Greatly improved Day & Night response

Does the picture convert itself between colour and b/w at the right time exactly and is the IR illumination on and off at the same time as well?

A new technology of Day and Night control is added to this device. An accurate control of image conversion and a precise operation of day & night filter movement at the right moment, gives a reliable image capturing capability in Colour mode at daytime and in B/W mode at nighttime.

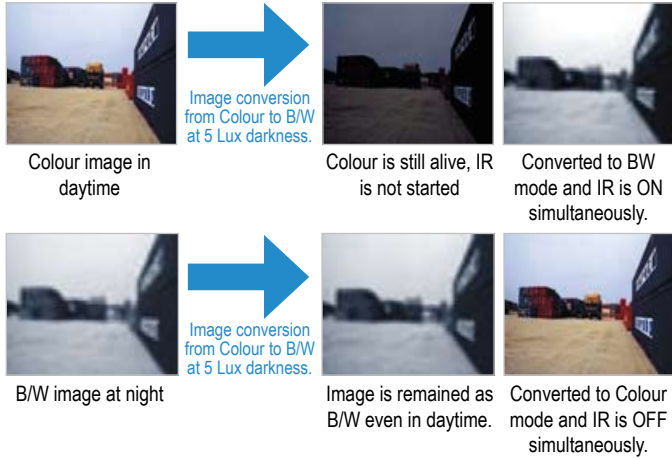

Camera ID setting

Users can use the camera identification (Camera ID) to assign a name of the camera. The camera ID consists of up to 15 alphanumeric characters.

Digital Zoom (1.5x, 2x, 3x)

The screen can be digitally zoomed with provided OSD control.



Privacy zone masking


When the unit is observing a wide area, the captured image can be masked for privacy purposes. Users can easily configure the size and position of the required privacy zones.



Dual switching power (w/Auto Line-lock)

The unit builds in highly efficient switching power control that self configures DC12V or AC24V input and AC24V line pulse automatically (Automatic line-lock). Double insulated power design guarantees no ground loop when used with multiple cameras and system equipment together through one power source.

Dimension

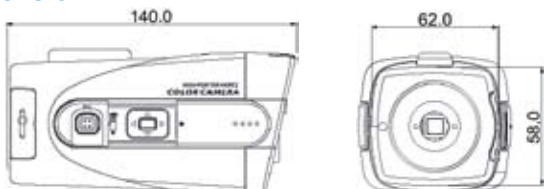

MODEL	VC57WD
Image Sensor	STD : 1/3" Sony double scan CCD
Effective Pixels	NTSC : 768(H) x 494(V) PAL : 752(H) x 582(V)
H.Resolution	NTSC : 500 TV Lines (at Day) / 550 TV Lines (at Night) PAL : 490 TV Lines (at Day) / 540 TV Lines (at Night)
Synchronizing System	Internal / Line Lock
Scanning System	NTSC 525 Lines PAL 625 Lines 2:1 Interlaced
Video Output	1.0Vp-p Composite. 75 Ohms
S/N Ratio	More than 48 dB (AGC Off)
Min. Illumination	0.2 Lux at F1.2 (DSS off) / 0.0001 Lux at F1.2 (DSS on)
Back Light Compensation	ON/OFF by OSD
Shutter Speed	NTSC : 1/60~1/100,000 sec PAL : 1/50 ~ 1/100,000 sec
Gamma correction	Standard $\gamma=0.45$
White balance	2100°K ~ 9100°K - Auto ATW/Push Lock / User selectable by OSD
Gain Control	Standard : -6dB ~ 42dB Auto / Maximum by OSD
Smear Effect	0.005%
Power Source	DC12V / AC24V Dual power
Operating Current	260mA at 12VDC, 130mA at 24VAC
Lens	C/CS Mount
Iris Control	ESC / Auto by slide switch
Operating Temperature	14°F ~ 122°F (-10°C ~ +50°C)
Humidity	Within 90% RH
Measurement (mm)	62(W) x 58(V) x 140(L)
Weight (Approx.g)	500
OSD Menu	
WDR	Auto / On / Off
White balance	Auto (ATW)/Push Lock/User selectable (Push: 1800°K~10,500°K)
Gain Control	Low, Middle, High, Off Selectable
Shutter speed	1/60 - 1/120,000 sec (NTSC), 1/50 - 1/100,000 sec (PAL)
Digital Slow Shutter	Off/2 x ~ 160 x (DSS)
Privacy Masking	On/Off (4 programmable zones)
Digital zoom	OFF/ON 1.5 x, 2 x, 3 x.

specification subject to change without notice

Function

