



HD-SDI

DS21.5SDI

21.5" (16:9) LED Monitor

DS21.5SDI

Panel Type	21.5" (16:9) LED Monitor
Case Type	Metal
Maximum Resolution	1920 (H) x 1080 (V)
Active Display Area	476.64 (H) × 268.11 (V) mm
Pixel Pitch	0.24825 (H) x 0.24825 (V) mm
Bezel Thickness	16.35mm
Contrast Ratio	1000:1
Brightness	250 cd/m ²
Response Time	1.1 - 3.5 ms
Viewing Angle	U/D: 80° / 80°, L/ R: 85° / 85°
Display Colours	16.7 M
Video Synchronization	Yes
PC Compatible Frequency	30-80KHz(H) / 50-75Hz(V)
Adjustable Colour Temperature	9300K / 6500K / 5800K / User
Video Compatibility	Multi-Standard for NTSC / PAL
Aspect Ratio	16:9
VGA Auto Frequency correction	Yes
Speaker	Multimedia Speakers
Number of Speakers	Right x 1, Left x 1, 2.5W
Sound Demodulation	Stereo, Audio
Mute	Yes
Work Humidity	20% - 70%
Work Temperature	-10 to 50 °C
Volume +/- Power On/Off	Yes



POWER

Power Supply	12VDC, 3amp
Voltage	AC100 - 240V 50 / 60Hz
Power Consumption	< 35W in "ON" Mode

OSD CONTROLS

Contrast, Brightness, Clock, Phase, H-Position, V-Position, Language

OSD LANGUAGE


English, French, German, Spanish, Italian, Russian, Polish and Portuguese

ACCESSORIES

Power Supply / Kettle Lead /VGA Cable / Audio Cable / User Manual / Remote Control

IN/OUT INTERFACE

Video Interface	HDMI x1 VGA x 1, SDI In X 1 BNC x 2 In/ BNC x 2 Out, SDI Out X 1
Audio Interface	Audio In x 1
Power Interface	AC In x 1
Termination	75 Ohms (Automatic Termination)
Safety & EMC Certification	CE / FCC / ROHS
Vesa Standard Mount	100 x 100mm
Stand Type	Desktop
Colour	Black
Packing Dimension	610 (W) x 510 (H) x 170 (D) mm
NET Weight	7.9 Kg
GROSS Weight	10.7 Kg

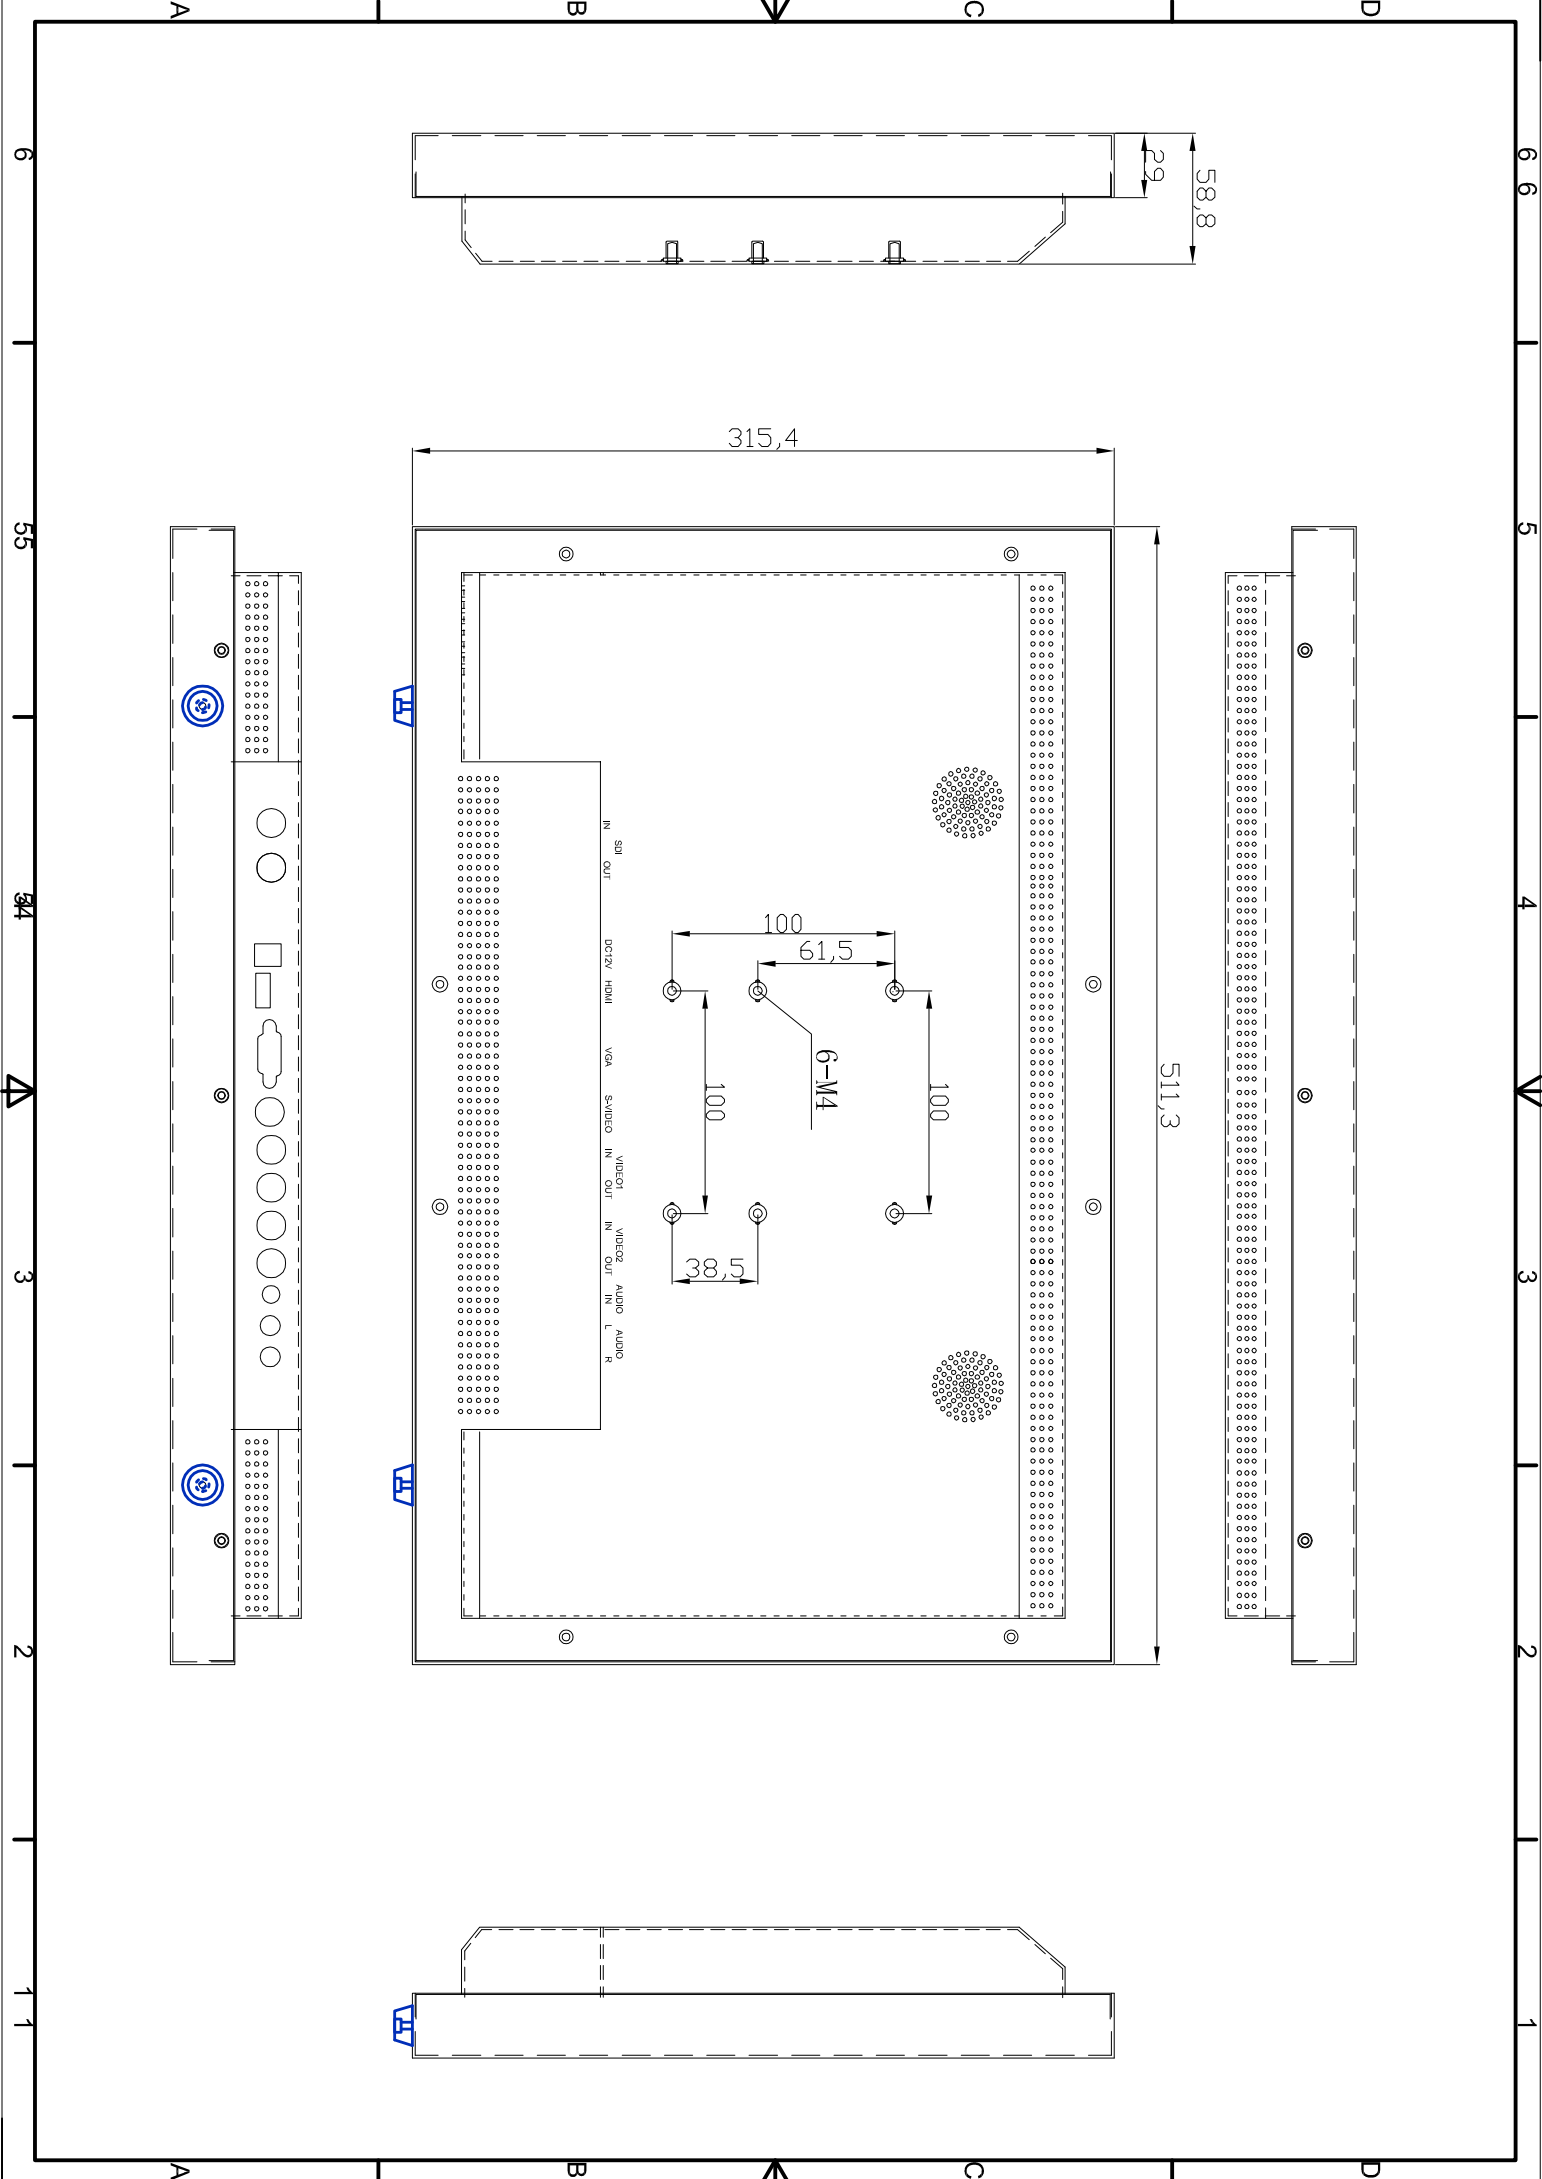

6 6 55 34 3 2 1 1

6 6 5 4 3 2 1

A A B B C C D D

A A B B C C D D

V V

TV

TV

TV

S/PDIF IN OUT
 DVI/HDMI
 VGA
 S-VIDEO IN OUT
 VIDEO1 IN OUT
 VIDEO2 IN OUT
 AUDIO L R

6-M4

100

61,5

100

100

5

5

315,4

511,3

58,8

29

